

Stainless Steel Angle Valve


Typical Applications.

Air Drying Equipment
 Autoclaves
 Bottling & Dispensing Equipment
 CIP Equipment
 Disinfection
 Food Industry
 Gas Industry
 Industrial Compressors
 Ink & Paint Dispensing
 Laundry Equipment
 Medical Equipment
 Pollution Control Equipment
 Process Control Applications
 Rubber machinery
 Steam Applications
 Sterilizers
 Textile Dyeing & Drying



Nominal Size	DN10 to DN50
Connections	G $\frac{3}{8}$ - G2
Nominal Pressure	PN16
Medium	Neutral gases & liquids
Medium Viscosity	600 mm ² /s (600 cSt)
Medium Temperature	-10°C to 180°C
Operation	Direct
Control	Single Acting
Control Media	Compressed air 3-8 BarG
Ambient Temperature	-10°C to 60°C
Installation	Actuator upwards

Construction.

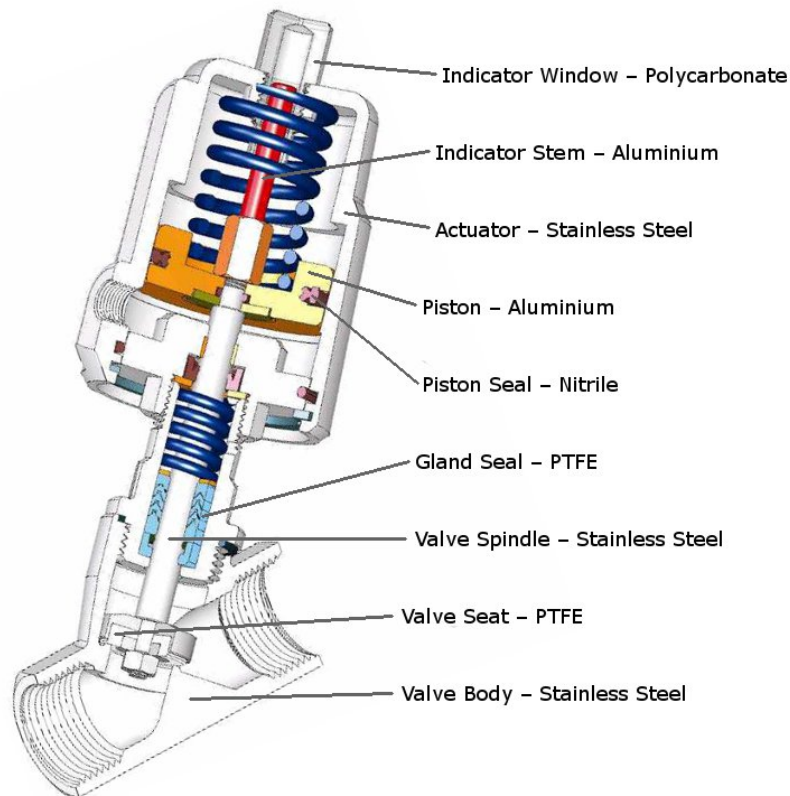

Dimensions.

Valve Size	Actuator Size	G	A	D	K	L	SW	R	T
DN10	40	G $\frac{3}{8}$	120	45.5	115	68	26.6	35	15
DN15	40	G $\frac{1}{2}$	120	45.5	115	68	26.6	35	15
DN20	50	G $\frac{3}{4}$	137	60	131	75	32	35	16
DN25	50	G1	149	60	140	90	39.5	35	17
DN32	63	G1 $\frac{1}{4}$	188	77	175	116	50	43	21
DN40	63	G1 $\frac{1}{2}$	190	77	178	120	55.3	43	20
DN50	63	G2	203	77	184	138	70	43	22

